
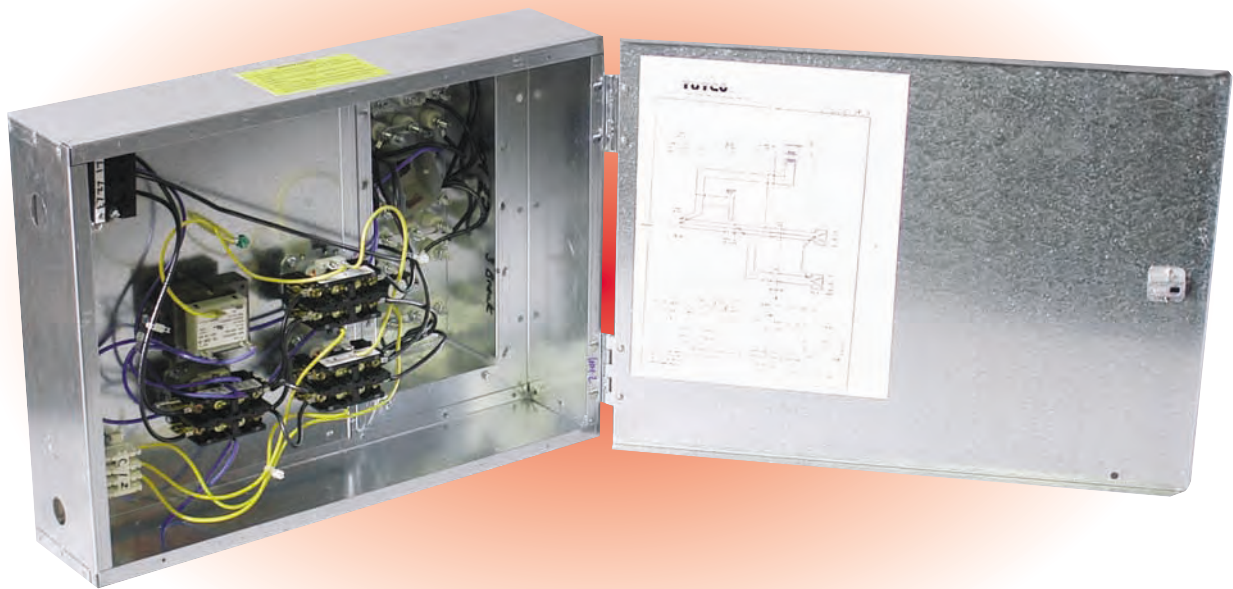


RMC REMOTE PANELS

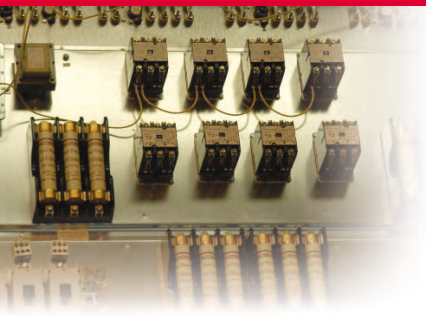

BASIC HEATER INCLUDES

- A de-energizing magnetic control contactor per stage of each 48 AMP circuit within a stage
- A magnetic backup contactor for each 48 AMP circuit
- 50 or 60 HZ design
- Fan Interlock
- Power terminal board
- Control terminal board
- Grounding lugs
- High voltage and low voltage terminal boards to interconnect remote panel with DHD or DD heaters
- Mounting brackets

OPTIONS

- Standard supply voltages to match DHD or DD heaters
- Standard control voltages to match DHD or DD heaters
- Single or three phase to match DHD or DD heaters
- Staging to match DHD or DD heaters
- Gasketed cover
- NEMA 1 wall mounted panel
- NEMA 4 wall mounted or free standing panel
- NEMA 12 wall mounted or free standing panel

ACCESSORIES

- See accessories page